

“All the ideas that have enormous consequences, are always simple ideas.”
L.T.



MAIN CONFIGURATIONS

models	operator interface	customer display	printer	general specifications range
ASC-300	15" monitor 1024 x 768 with led backlight TFT touchscreen number of PLU free	X	base printer module high resolution 3" thermal head paper width min.: 56mm max: 80mm - roll diameter 120mm	Scale capacity multirange load 12-30 kg
AS-303	15" monitor 1024 x 768 with led backlight TFT touchscreen number of PLU free	X	vertical printer module high resolution 3" thermal head paper width min.: 56mm max: 80mm - roll diameter	connections Usb(x4) serial RS 232(x2) ethernet(x1) Audio output external printer power
PL-323	15" monitor 1024 x 768 with led backlight TFT touchscreen number of operators 99	10.4" TFT monitor with led backlight	vertical printer module high resolution 3" thermal head paper width min.: 56mm max: 80mm - roll diameter	Power 230Vca (+10% -15%) battery backup
PLC-221	10.4" TFT touchscreen number of operators 99	800 x 600 TFT monitor with led backlight	base printer module high resolution 3" thermal head paper width min.: 56mm max: 80mm - roll diameter 120mm	CPU Quad ARM Cortex A9 -1.2GHz
CS-211	10.4" TFT touchscreen number of operators 99	800 x 600 TFT monitor with led backlight	base printer module high resolution 3" thermal head paper width min.: 56mm max: 80mm - roll diameter 120mm	Speaker internal speaker (output for external speakers)
ASC-000	100 capacitive keys 7" TFT touch with led backlight 100 PLU	X	base printer module high resolution 3" thermal head paper width min.: 56mm max: 80mm - roll diameter 120mm	Optional extra scale pan
AS-003	100 capacitive keys 7" TFT touch with led backlight 100 PLU	X	vertical printer module high resolution 3" thermal head paper width min.: 56mm max: 80mm - roll diameter	Scale capacity multirange load 12-30 kg
PL-012	61 capacitive keys 7" TFT touch with led backlight 32 direct PLU - number of operators 99	7" TFT monitor with led backlight	stand alone printer module high resolution 3" thermal head paper width min.: 56mm max: 80mm - roll diameter	connections Usb (x4) serial RS 232(x2) ethernet (x1) printer power
PLC-010	61 capacitive keys 7" TFT touch with led backlight 32 direct PLU - number of operators 99	7" TFT monitor with led backlight	base printer module high resolution 3" thermal head paper width min.: 56mm max: 80mm - roll diameter 120mm	Power 230Vca (+10% -15%) battery backup
CS-010	61 capacitive keys 7" TFT touch with led backlight 32 direct PLU - number of operators 99	800 x 480 TFT monitor with led backlight	base printer module high resolution 3" thermal head paper width min.: 56mm max: 80mm - roll diameter 120mm	CPU Dual lite ARM Cortex A9 at 1.0GHz
				Optional extra scale pan

COD. 88D162



EXTREME AS



Modern Dual Core processor,
highspeed interfaces

ADVANCE PLC




Capacitive interface,
new user experience

ADVANCE PL



Suitable design for all
areas and environments

ADVANCE AS

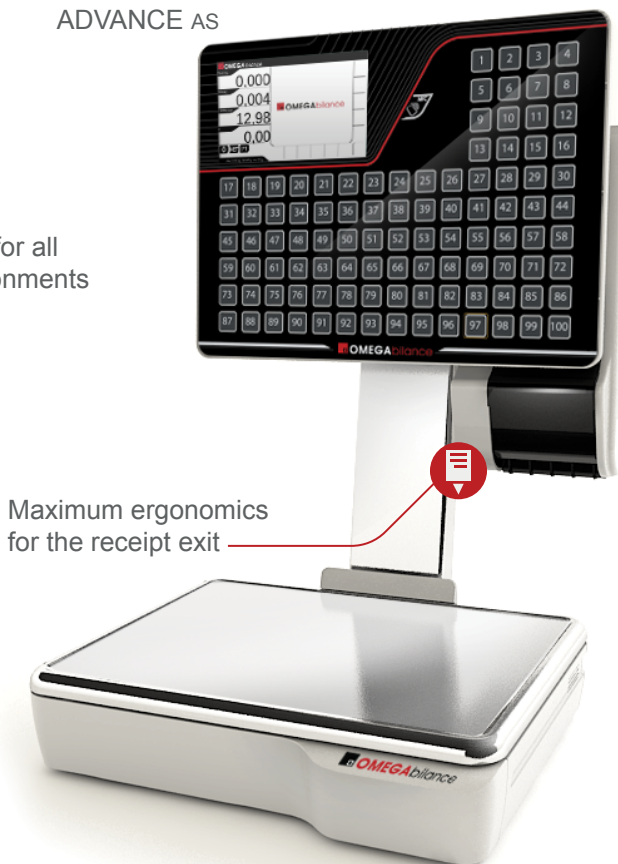

Maximum ergonomics
for the receipt exit

OMEGAbalance



Modular system



Innovative design



Strength



Compact



Ergonomics & simple



Eco-friendly

visit our website
Discover all our products
www.ditron.eu



Innovation in the world of scales

EXTREME PLC



Very easy to clean

ADVANCE CS



Front printer opening compartment
for easy and fast paper loading



New interfaces,
easy to use

EXTREME CS



Printer module,
maximum installation flexibility



Adjustable displays,
high visibility for customer and operator

